

# SERVICE INFO



## Visual differences in belt tensioner 533 0086 30

### Vehicle

**Manufacturers:** Audi, Ford, Seat, Volkswagen

### Models:

**Audi:** A6, 80  
**Ford:** Galaxy  
**Seat:** Alhambra, Cordoba, Ibiza II, Inca, Toledo I  
**VW:** Caddy II, Golf III, Golf IV, Passat, Polo, Sharan, Vento, Transporter T4

### Engines:


1.7 D, 1.7 SDI  
1.9 D, 1.9 SDI, 1.9 TDI  
2.4 D, 2.5 D

### OE Nos.:


**Ford:** 95VW-10145-DA  
1039808  
**VW Group:** 028 903 315 N (replaced)  
028 903 315 R (new)

### Part No.:

533 0086 30

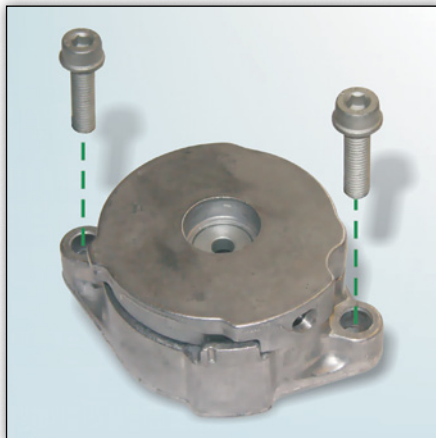

**Image 1:** INA design with two M8x35 bolts

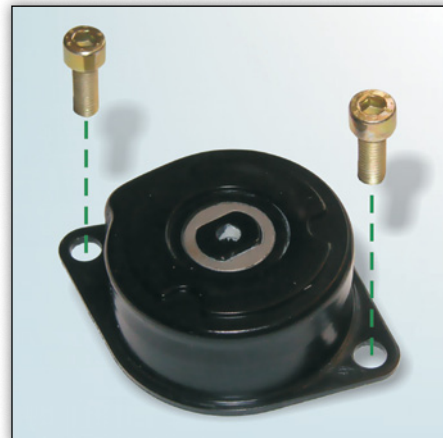

**Image 2:** Design with two M8x22 bolts

When replacing the belt tensioner 533 0086 30, the versions shown can be installed on the vehicle. Schaeffler Automotive Aftermarket currently offers the version shown in Image 1.

Both versions conform to technical requirements.

### Note:

The bolts (M8x35) supplied by Schaeffler Automotive Aftermarket must be used due to the greater flange thickness of the belt tensioner 533 0086 30 (Image 1).



Note the specifications of the vehicle manufacturer!

Appropriate spare parts can be found in our on-line catalogue at [www.Schaeffler-Aftermarket.com](http://www.Schaeffler-Aftermarket.com) or in RepXpert at [www.RepXpert.com](http://www.RepXpert.com).

Issued 03.2010

**INA 0054**

Subject to technical changes

© 2010 Schaeffler Automotive Aftermarket

### For further information:

Phone: +44 (0) 14 32 264 264\*

Fax: +44 (0) 14 32 375 760

Info@LuK-AS.co.uk

[www.Schaeffler-Aftermarket.com](http://www.Schaeffler-Aftermarket.com)

\* Calls from within the UK 08457 001100

